
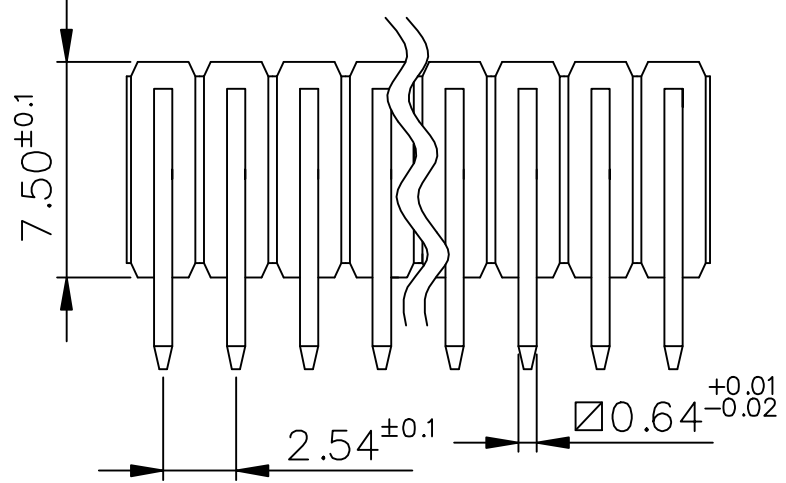


THIS DRAWING IS THE PROPERTY OF FIORTECH FACTORY AND IT CAN NOT BE USED, REPRODUCED AND OR LOANED TO THIRD PARTIES WITHOUT THE WRITTEN PERMISSION OF FIORTECH

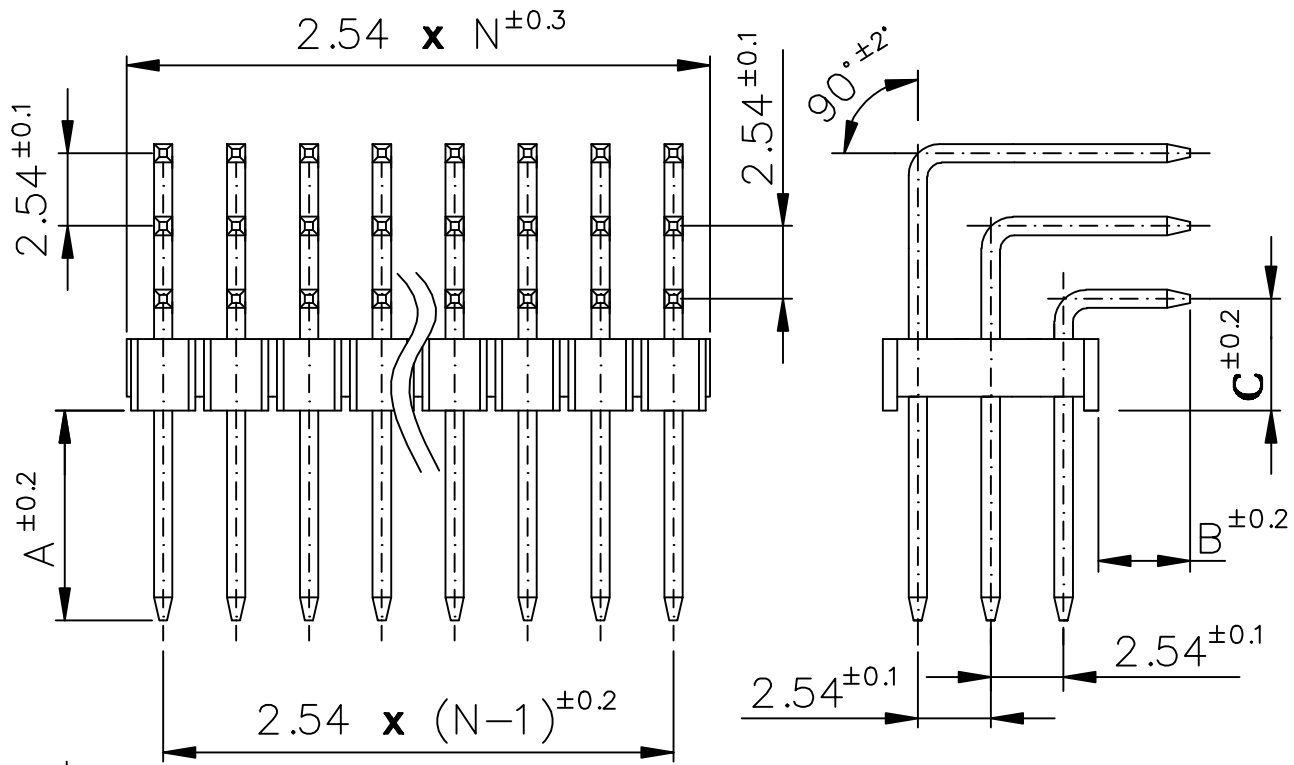

- Plating:**
- (YY) = FG = gold flash
 - (YY) = G1 = gold 0.12µm
 - (YY) = G2 = gold 0.25µm
 - (YY) = G3 = gold 0.50µm
 - (YY) = G4 = gold 0.75µm
 - (YY) = TF = pure tin flash
 - (YY) = T1 = pure tin 5µm
 - (YY) = FS = selective gold flash
 - (YY) = S1 = selective gold 0.12µm
 - (YY) = S2 = selective gold 0.25µm
 - (YY) = S3 = selective gold 0.50µm
 - (YY) = S4 = selective gold 0.75µm

Put the desired dimensions for A, B and C in mm unit

(XX) = N = number of contacts per row between 02 and 50

CM-254-A-3x (XX) -1- (YY) - A/B/C

QUESTO DISEGNO E' DI PROPRIETA' DELLA DITTA FIORTECH E NON PUO' ESSERE USATO, E/O CEDUTO A TERZI SENZA IL PERMESSO SCRITTO DELLA FIORTECH

	ELECTRICAL PROPERTIES		MECHANICAL PROPERTIES	
	Current rate: 3 Ampère Insulation resistance: 5000MΩ min. Contact resistance: 10mΩ max. Dielectric Voltage: 500V AC for 1 minute		Operating temperature: -40°C + +105°C Peak temperature: 160° for 5+10 sec PCB recommended holes: ø1.02mm	
INDEX	DATE	MODIFICATION OCCURRED		VISA Scale
TOLERANCES FOR FREE DIMENSIONS				Material: Pin: copper alloy Insulator: Nylon 6T (UL94V0)
ANGULAR VALUES ±2°	FROM 0.5 TO 3.0	FROM >3.0 TO 6.0	FROM >6.0 TO 10.0	Plating: See table
	FROM >10.0 TO 18.0	FROM >18.0 TO 30.0	FROM >30.0 TO 50.0	Date of creation: 16-02-06
	FROM >50.0 TO 80.0	FROM >80.0 TO 120.0	FROM >120.0 TO 180.0	Designer: Chiappini R.
	FROM >180.0 TO 250.0	FROM >250.0 TO 315.0	FROM >315.0 TO 400.0	Notes: --

Part number: CM-254-A-3x (XX) -1- (YY) -A/B/C

Drawing number: _____

Index: _____

File: _____

Description: Triple row right angle male connector pitch 2.54mm

